



# MANUAL ELECTRIC STACKER

Model : ESTK-15 W M3 | Capacity : 1500 kgs

Manual Electric Stacker - Straddle is also known as a semi-battery operated wider base stacker. These stackers are a cost-effective option, unique equipment for handling non-standard pallet or loads. This equipment is available with adjustable forks and a wider base which gives maximum stability while handling loads at height. These stackers are easy to use with simple push button operated lifting & lowering operations.

This range of stacker is also available in A.C. version, with flameproof electricals. There are many other compatible accessories available for use with this equipment in a variety of applications. This range of equipment from JAY are very useful across all segments of industries.


This equipment is equipped with in-built battery charger for easy charging anywhere any time. It is also equipped with steering wheels which ensure easy manoeuvrability.

## KEY FEATURES:


- In-built battery charger
- Steering wheel for easy manoeuvrability
- Battery indicator
- Foot guard for operator safety
- Long tiller for effortless operations



Steered wheel with foot guard



Gas spring loaded steering handle



Hassle free battery charging (Plug & Play)



Battery Indicator, Push button controls & key switch



CONFIDENCE TAKEN TO NEW HEIGHTS.

# LIFT TRUCKS




## MANUAL ELECTRIC STACKER

### SPECIFICATIONS

			UNIT	ESTK-15 W M3
CHARACTERISTICS	Drive type/Power	-	-	Semi-Electric
	Operation type/Driving mode	-	-	Hand
	Rated load capacity	Q	Kg	1500
	Load centre distance	c	mm	600
	Front overhang distance	x	mm	790
	Track/Wheel base	Y	mm	1210
WHEEL CHASIS	Tyre	-	-	Nylon
	Tyre size, rear/drive side	-	mm	Ø180X50
	Tyre size, front/load side	-	mm	Ø82X70
	Wheel number (front/load+rear/drive)	-	-	4+2
	Wheel Track (rear/drive)	b10	mm	720
	Wheel Track (front/load)	b11	mm	1400
BASIC DIMENSION	Lift height	h3	mm	3000
	Mast height lowered	h1	mm	2130
	Extended mast height	h4	mm	3590
	Handle height minimum/maximum	h14	mm	885/1165
	Fork lowered height	h13	mm	95
	Overall length	l1	mm	1940
	Length inclusive back of fork	l2	mm	790
	Overall width	b1	mm	1500
	Fork dimension	s/e/l	mm	58/180/1150
	Width over fork/Lateral distance of fork	b5	mm	1200 <sup>Max</sup> /400 <sup>Min</sup>
	Ground clearance	m2	mm	29
	Aisle width for pallet I-1000 x w-1200 sideway/crossway	Ast	mm	-
	Aisle width for pallet I-800 x w-1200 lengthway	Ast	mm	-
	Turning radius	Wa	mm	-
PERFORMANCE /CAPABILITY	Lifting speed - laden/unladen	-	m/s	0.08/0.12
	Lowering speed - laden/unladen	-	m/s	0.12/0.08
	Parking Brake	-	-	Manual
ELECTRIC MOTOR	Lift motor rating S3 15%	-	kW	1.6
	Battery voltage, nominal capacity K5	-	V/Ah	12 / 130
	Battery weight	-	V/A	36
OTHER	Sound pressure level at operator's ear	-	dB (A)	<70
	Turning angle	-	°	100
WEIGHT	Net weight inclusive battery	-	kg	730

### Capacity (At 600mm LC) Kgs.

Mast Type	Lift ht.	Lowered ht.	Extended ht.	ESTK-15 W M3
Wide View Mono & Telescopic Mast	(h3)	(h1)	(h4)	
	mm	mm	mm	mm
	1600	2000	2000	1500
	2500	1880	3090	1500
	3000	2130	3590	1100
	3500	2380	4090	740
	4000	2630	4590	450
4200	2730	4790	450	

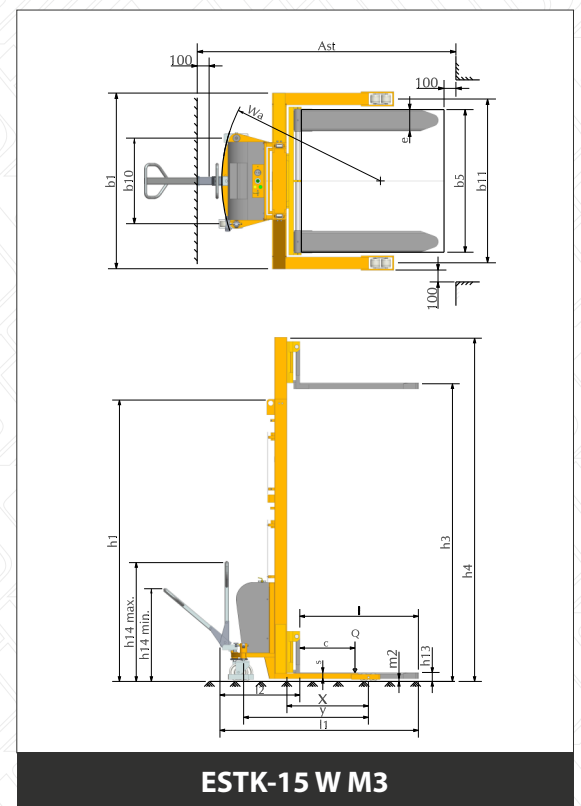

- \* This specification sheet only provides technical values for the standard equipment only. Customised equipments, Non-standard tyres, different masts, additional equipment, use of accessories, etc. may produce other values
- \* The values in the table are as per the standard test practices, and actual values may differ as per the site conditions.
- \* We reserve the rights to technical changes and improvements, without any prior intimations.

